



# 慈溪市万捷电子有限公司

## CIXI WANJIE ELECTRONIC CO., LTD





### REVISION RECORD

REV.	DESCRIPTION	ECN No.	APPROVED	DATE



UL/CUL 技术参数		UL/CUL Technical Data			
等级	Use Group	B	C	D	
额定电压	Rated Voltage	V	300	-	300
额定电流	Rated Current	A	8	-	8
接线范围	Wire Range	24-16			
单/多芯线	Solid/Stranded	AWG			
耐压	Withstanding Voltage	1600V/1Min			
IEC 技术参数		IEC61984			
IEC Technical Data		IEC61984			
过电压类别	Overtoltage Category	III	III	II	
污染等级	Contamination Class	3	2	2	
额定电压	Rated Voltage	V	160	160	320
额定电流	Rated Current	A	8	8	8
额定冲击电压	Impulse withstand voltage	[kV]	2.5	2.5	2.5
导线截面积	Conductor cross section	[mm <sup>2</sup> ]	0.5-1.5		
导线类型	Conductor type	硬质/柔性导线	Solid/flexible		

材料		Material	
绝缘材料	Insulation Material	PA66	
阻燃等级	Inflammability	UL94V-0	
导体材料	Contact Material	铜合金 Copper alloy	
导体表面处理	Contactive Coating	镀锡 Sn Plated	
一般参数			
间距	Pitch / 极数	Poles	[mm] / [P]
			3.5 / 02-24
引线长度	Shipping Length	[mm]	9-10
螺丝	Screw/扭矩	Torque(N.m)	-
工作温度	Operating temperature	[°C]	40~105
焊接温度	Soldering temperature	[°C]	-
引脚尺寸	Pin Dimensions	[mm]	-
PCB孔径	PCB Hole Diameter	[mm]	-

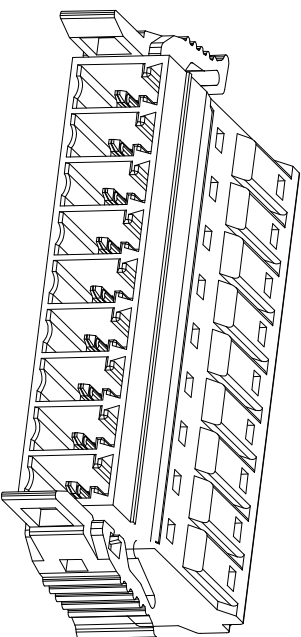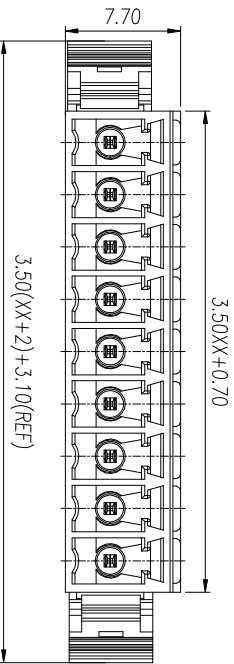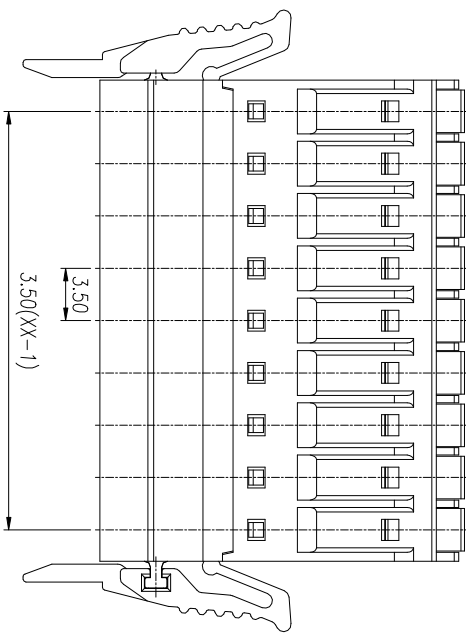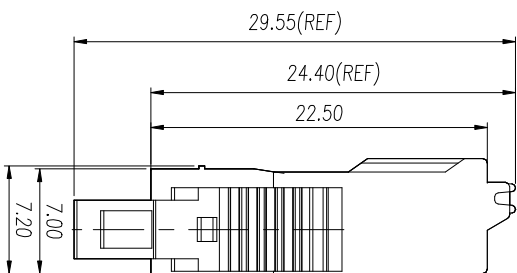

linear dimension	Tolerances Standard GB/T 14486-2008)											
variable range	6 to	over 6 to	over 10 to	over 30 to	over 60 to	over 100 to	over 160 to	over 160 to	10 to	over 10 to	over 100 to	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	±1.60	0.10	0.30	0.60	0.60

单位 / UNITS mm 尺寸 / SIZE A4 比例 / SCALE 2:1

第三视图/THIRD ANGLE PROJECTION 版本 / REV V0



慈溪市万捷电子有限公司  
CIXI WANJIE ELECTRONIC CO., LTD

名称 / TITLE WJ15EDGKMRG-3.5-XXP-1Y-00A